

# Abstract for Production of Solar Grade Silicon for Solar Wafer


*Ensymm abstract for the production of Silicon Crystals for application in Solar Cells and Solar Technology*



# INTRODUCTION

A solar cell, or photovoltaic cell, is a semiconductor device consisting of a large-area p-n junction diode, which, in the presence of sunlight, is capable of generating usable electrical energy. This conversion is called the photovoltaic effect. The field of research related to solar cells is known as photovoltaic. Solar cells have many applications. They are particularly well suited to, and historically used in situations where electrical power from the grid is unavailable, such as in remote area power systems, Earth orbiting satellites, handheld calculator, remote radiotelephones, water pumping applications, etc. Solar cells (in the form of modules or solar panels) are appearing on

building roofs where they are connected through an inverter to the electricity grid in a net metering arrangement. Various materials have been investigated for solar cells. There are two main criteria - efficiency and cost. Efficiency is a ratio of the electric power output to the light power input. Ideally, near the equator at noon on a clear day, the solar radiation is approximately  $1000 \text{ W/m}^2$ . So a 10% efficient module of 1 square meter can power a 100 W light bulb.

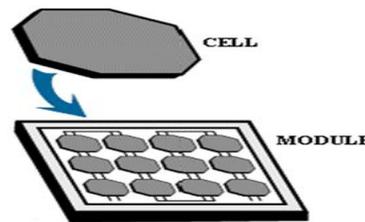

*Photovoltaic Modules (Source: NASA Science)*

Costs and efficiencies of the materials vary greatly. By far the most common material for solar cells (and all other semiconductor devices) is crystalline silicon. Crystalline silicon solar cells come in three primary categories:

- **Single crystal or mono-crystalline wafers** made using the *Czochralski* process. Most of the commercial monocrystalline cells have efficiencies of about 14%. SunPower cells have high efficiencies around 20%. Single crystal cells tend to be expensive and because they are cut from cylindrical ingots, they cannot completely cover a module without a substantial

# CATEGORIES OF CRYSTALLINE SILICON CELLS

waste of refined silicon. Most monocrystalline panels have uncovered gaps at the corners of four cells.

- **Poly or multi crystalline** made from cast ingots - large crucibles of molten silicon carefully cooled and solidified. See *GT Solar HEM Furnace*, *BP Solar*, *sharp Sharp Solar* and *Kyocera Solar*. These cells are cheaper than single crystal cells, but also somewhat less efficient. However, they can easily be formed into square shapes that cover a greater fraction of a panel than monocrystalline cells, and this compensates for their lower efficiencies.

**Ribbon silicon** formed by drawing flat thin films from molten silicon and has a multicrystalline structure. See *Evergreen Solar*, and *RWE Schott Solar*. These cells are typically the least efficient, but there is a cost savings since there is very little silicon waste since this approach does not require sawing from ingots. These technologies are wafer based manufacturing. In other words, in each of the above approaches, self supporting wafers of ~300 micrometers thick are fabricated and then soldered together to form a module. Thin film approaches are module based. The entire module substrate is coated with the desired layers and a laser scribe is then used to delineate individual cells. Two main thin film approaches are:

- **Amorphous silicon films** are fabricated using chemical vapor deposition techniques, typically plasma enhanced (PE-CVD). These cells have low efficiencies about 8%.
- **CIS** stands for general chalcogenide films of  $\text{Cu}(\text{In}_x\text{Ga}_{1-x})(\text{Se}_x\text{S}_{1-x})_2$ . While these films can achieve 11% efficiency, their costs are still too high.

There are additional materials and approaches. For example, Sanyo has pioneered the HIT cell. In this technology, amorphous silicon films are deposited onto crystalline silicon wafers.

# MATERIALS AND DIFFERENT APPROACHES

Solar Module




Solar Cells



Wafers



Ingots



Silicon



Silica




## Solar Cells

To understand the operation of a PV cell, we need to consider both the nature of the material and the nature of sunlight. Solar cells consist of two types of material, often p-type silicon and n-type silicon. Light of certain wavelengths is able to ionize the atoms in the silicon and the internal field produced by the junction separates some of the positive charges ("holes") from the negative charges (electrons) within the photovoltaic device. The holes are swept into the positive or p-layer and the electrons are swept into the negative or n-layer. Although these opposite charges are attracted to each other, most of them can only recombine by passing through an external circuit outside the material

# MATERIALS AND DIFFERENT APPROACHES

because of the internal potential energy barrier. Therefore if a circuit is made power can be produced from the cells under illumination, since the free electrons have to pass through the load to recombine with the positive holes. The amount of power available from a PV device is determined by:

- The type and area of the material
- The intensity of the sunlight

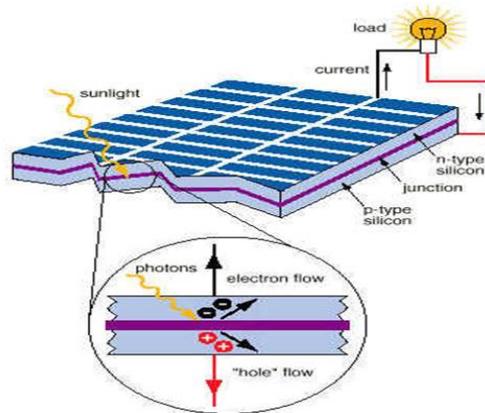

- The wavelength of the sunlight

Single crystal silicon solar cells, for example cannot currently convert more than 25% of the solar energy into electricity, because the radiation in the infrared region of the electromagnetic spectrum does not have enough energy to separate the positive and negative charges in the material. Polycrystalline silicon solar cells have an efficiency of less than 20% at this time and amorphous silicon cells, are presently about 10% efficient, due to higher internal energy losses than single crystal silicon. A typical single crystal silicon PV cell of 100 cm<sup>2</sup> will produce about 1.5 watts of power at 0.5 volts DC and 3 amps under full summer sunlight (1000Wm<sup>-2</sup>). The power output of

the cell is almost directly proportional to the intensity of the sunlight. (For example, if the intensity of the sunlight is halved the power will also be halved). An important feature of PV cells is that the voltage of the cell does not depend on its size, and remains fairly constant with changing light intensity. However, the current in a device is almost directly proportional to light intensity and size. When people want to compare different sized cells, they record the current density, or amps per square centimeter of cell area.

The power output of a solar cell can be increased quite effectively by using a tracking mechanism to keep the PV device directly facing the sun, or by concentrating the sunlight using lenses or mirrors. However, there are

# PRODUCTION PATHWAY OF SOLAR CELLS FROM SILICA THROUGH SILICON CRYSTAL



limits to this process, due to the complexity of the mechanisms, and the need to cool the cells. The current output is relatively stable at higher temperatures, but the voltage is reduced, leading to a drop

in power as the cell temperature is increased.

More information on PV concentrators can be found later in this information file.

Scope of supply proposed by ensymm:

- Lab and Pilot scale
- Technology transfer and know-how

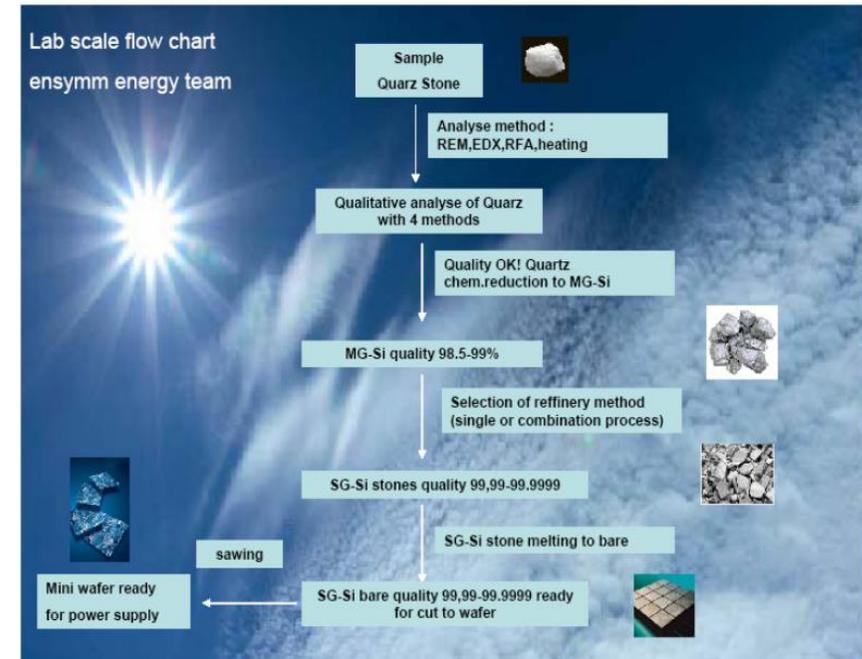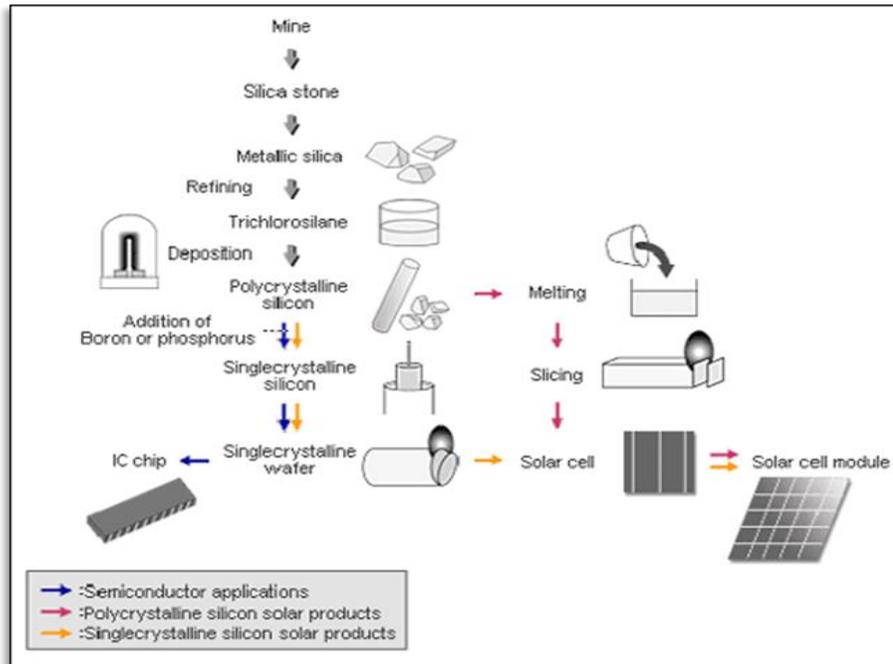

ensymm is a German based premier project consulting company for Life Sciences, serving biotech companies, pharmaceutical industry and food ingredient companies. We provide clients with a variety of business and technology consulting services as well as with specialized teams in various areas of our competence.



*For further inquiries and quotes, please contact:*

**ensymm UG & Co.KG**

Life Science Center Dusseldorf  
Merowingerplatz 1  
40225 Dusseldorf  
Germany

Tel: 0049 2113367527

[Project\\_assistant@ensymm.com](mailto:Project_assistant@ensymm.com)

[www.ensymm.com](http://www.ensymm.com)

